

# State Select ULD series COMMERCIAL LIGHT DUTY ELECTRIC WATER HEATER

DORSULD 40/50

DORTULD 66/80/120



- Immersion heating element. Standard supplied with incoloy element of 4.5 kW, operating at 380-415 Volt, two elements operating simultaneous providing 9kW recovery capacity
- Surface mounted control thermostats with a temperature range from 48°C/120°F to maximum 77°C/170°F and hi-limit factory fixed setting at 88°C/190°F.
- Thermostats are accurate to  $\pm 2.5^{\circ}\text{C}/5^{\circ}\text{F}$ .
- Diffuser dip tube carries incoming cold water from the top connection, to the bottom of the tank to minimize mixing with the hot water in the tank. Helps reduce lime and sediment buildup while maximizing hot water output. Made from long-lasting PEX cross-linked polymer.
- Our Coregard™ anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods.
- Durable, tamper-resistant brass drain valve
- The internal pressure tank is constructed of heavy duty carbon steel. Maximum working pressure is rated at 150psi/10bar. Test pressure per UL 174 std is 300psi/20bar.
- Specially developed commercial grade glass coating protects steel tank from corrosion and maximizes tank life.
- Factory installed, side-mounted, CSA/ASME certified T&P safety relief valve is standard on all models.
- All models are equipped with factory installed heat traps on the inlet and outlet connections to improve energy efficiency.
- Code compliance meets the Federal Energy Efficiency Standards according to the 2004 edition of the National Appliance Energy Conservation Act (NAECA) of 1992 and standby loss requirements of the U. S. Department of Energy and Current Edition of ASHRAE/IES 90.1.
- Comply with UL 174, GSO, PAI and IEC 60335-2-21.



هيئة التقييس  
 لدول مجلس التعاون لدول الخليج العربية  
 GCC Standardization Organization


## SAMPLE SPECIFICATION

The heater(s) shall be Light Duty Series Commercial Electric Model Number \_\_\_\_\_ as manufactured by State water heating industries. Heater(s) shall be rated at \_\_\_\_\_ kW, \_\_\_\_\_ volts, \_\_\_\_\_ phase, 60 cycle AC, and listed by Underwriters' Laboratories. Tank(s) shall be \_\_\_\_\_ gallon capacity. Tanks shall have \_\_\_\_\_ (150 [Std] or 160 [ASME]) psi working pressure and be equipped with extruded high density anode. Electric heating elements shall be low watt density. Each element shall be controlled by an individually mounted thermostat and high temperature cut-off switch. The outer jacket shall be of baked enamel finish and shall enclose the tank with foam insulation. The drain valve shall be located in the front for ease of servicing. Heater tank shall have a six year limited warranty as outlined in the written warranty. Meets standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1.

Model number	Gallon capacity	Energy factor	First Hour Rating (Gallons)	Voltage	Element wattage	Total input	Recovery @45°C Rise Gallons Per Hour	Dimensions			Approx. Shipping Weight (lbs)
								A	B	C	
ES6 40 DORSULD	38	0,92	61	400V-415V	3000/3000	6000	31	48	41	20	103
ES6 40 DORSULD	38	0,92	76	400V-415V	4500/4500	9000	46	48	41	20	103
ES6 50 DORSULD	50	0,90	71	400V-415V	3000/3000	6000	31	48	41	22	121
ES6 50 DORSULD	50	0,90	86	400V-415V	4500/4500	9000	46	48	41	22	121
ES6 66 DORTULD	61	0,88	79	400V-415V	3000/3000	6000	31	60	53	21	178
ES6 66 DORTULD	61	0,88	95	400V-415V	4500/4500	9000	46	60	53	21	178
ES6 80 DORTULD	73	0,86	89	400V-415V	3000/3000	6000	31	61	52	23	208
ES6 80 DORTULD	73	0,86	104	400V-415V	4500/4500	9000	46	61	52	23	208
ES6 120 DORTULD	106	0,83	115	400V-415V	3000/3000	6000	31	62	55	28	278
ES6 120 DORTULD	106	0,83	131	400V-415V	4500/4500	9000	46	62	55	28	278

Recoveries are rounded to nearest gallon, and are based upon the standard element offering.  
Water connections – 3/4" on all models.

\*This model is not available with top-mounted T&P valve.

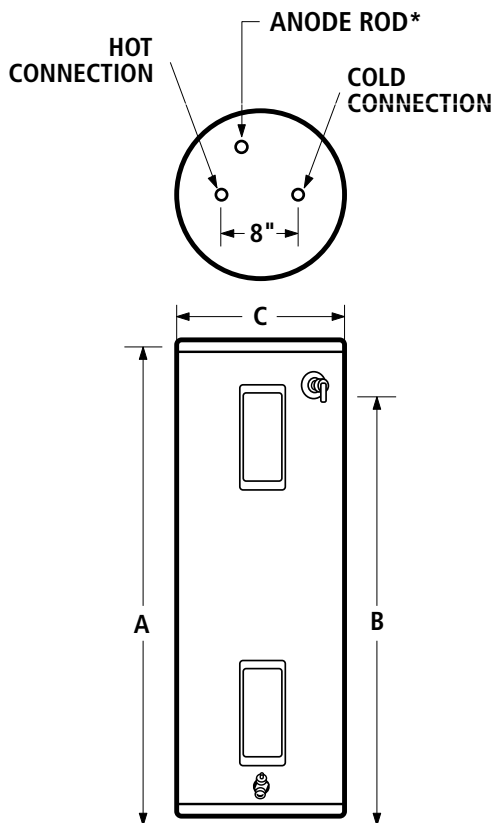

\*Location for optional T&P Valve, if available and ordered from factory